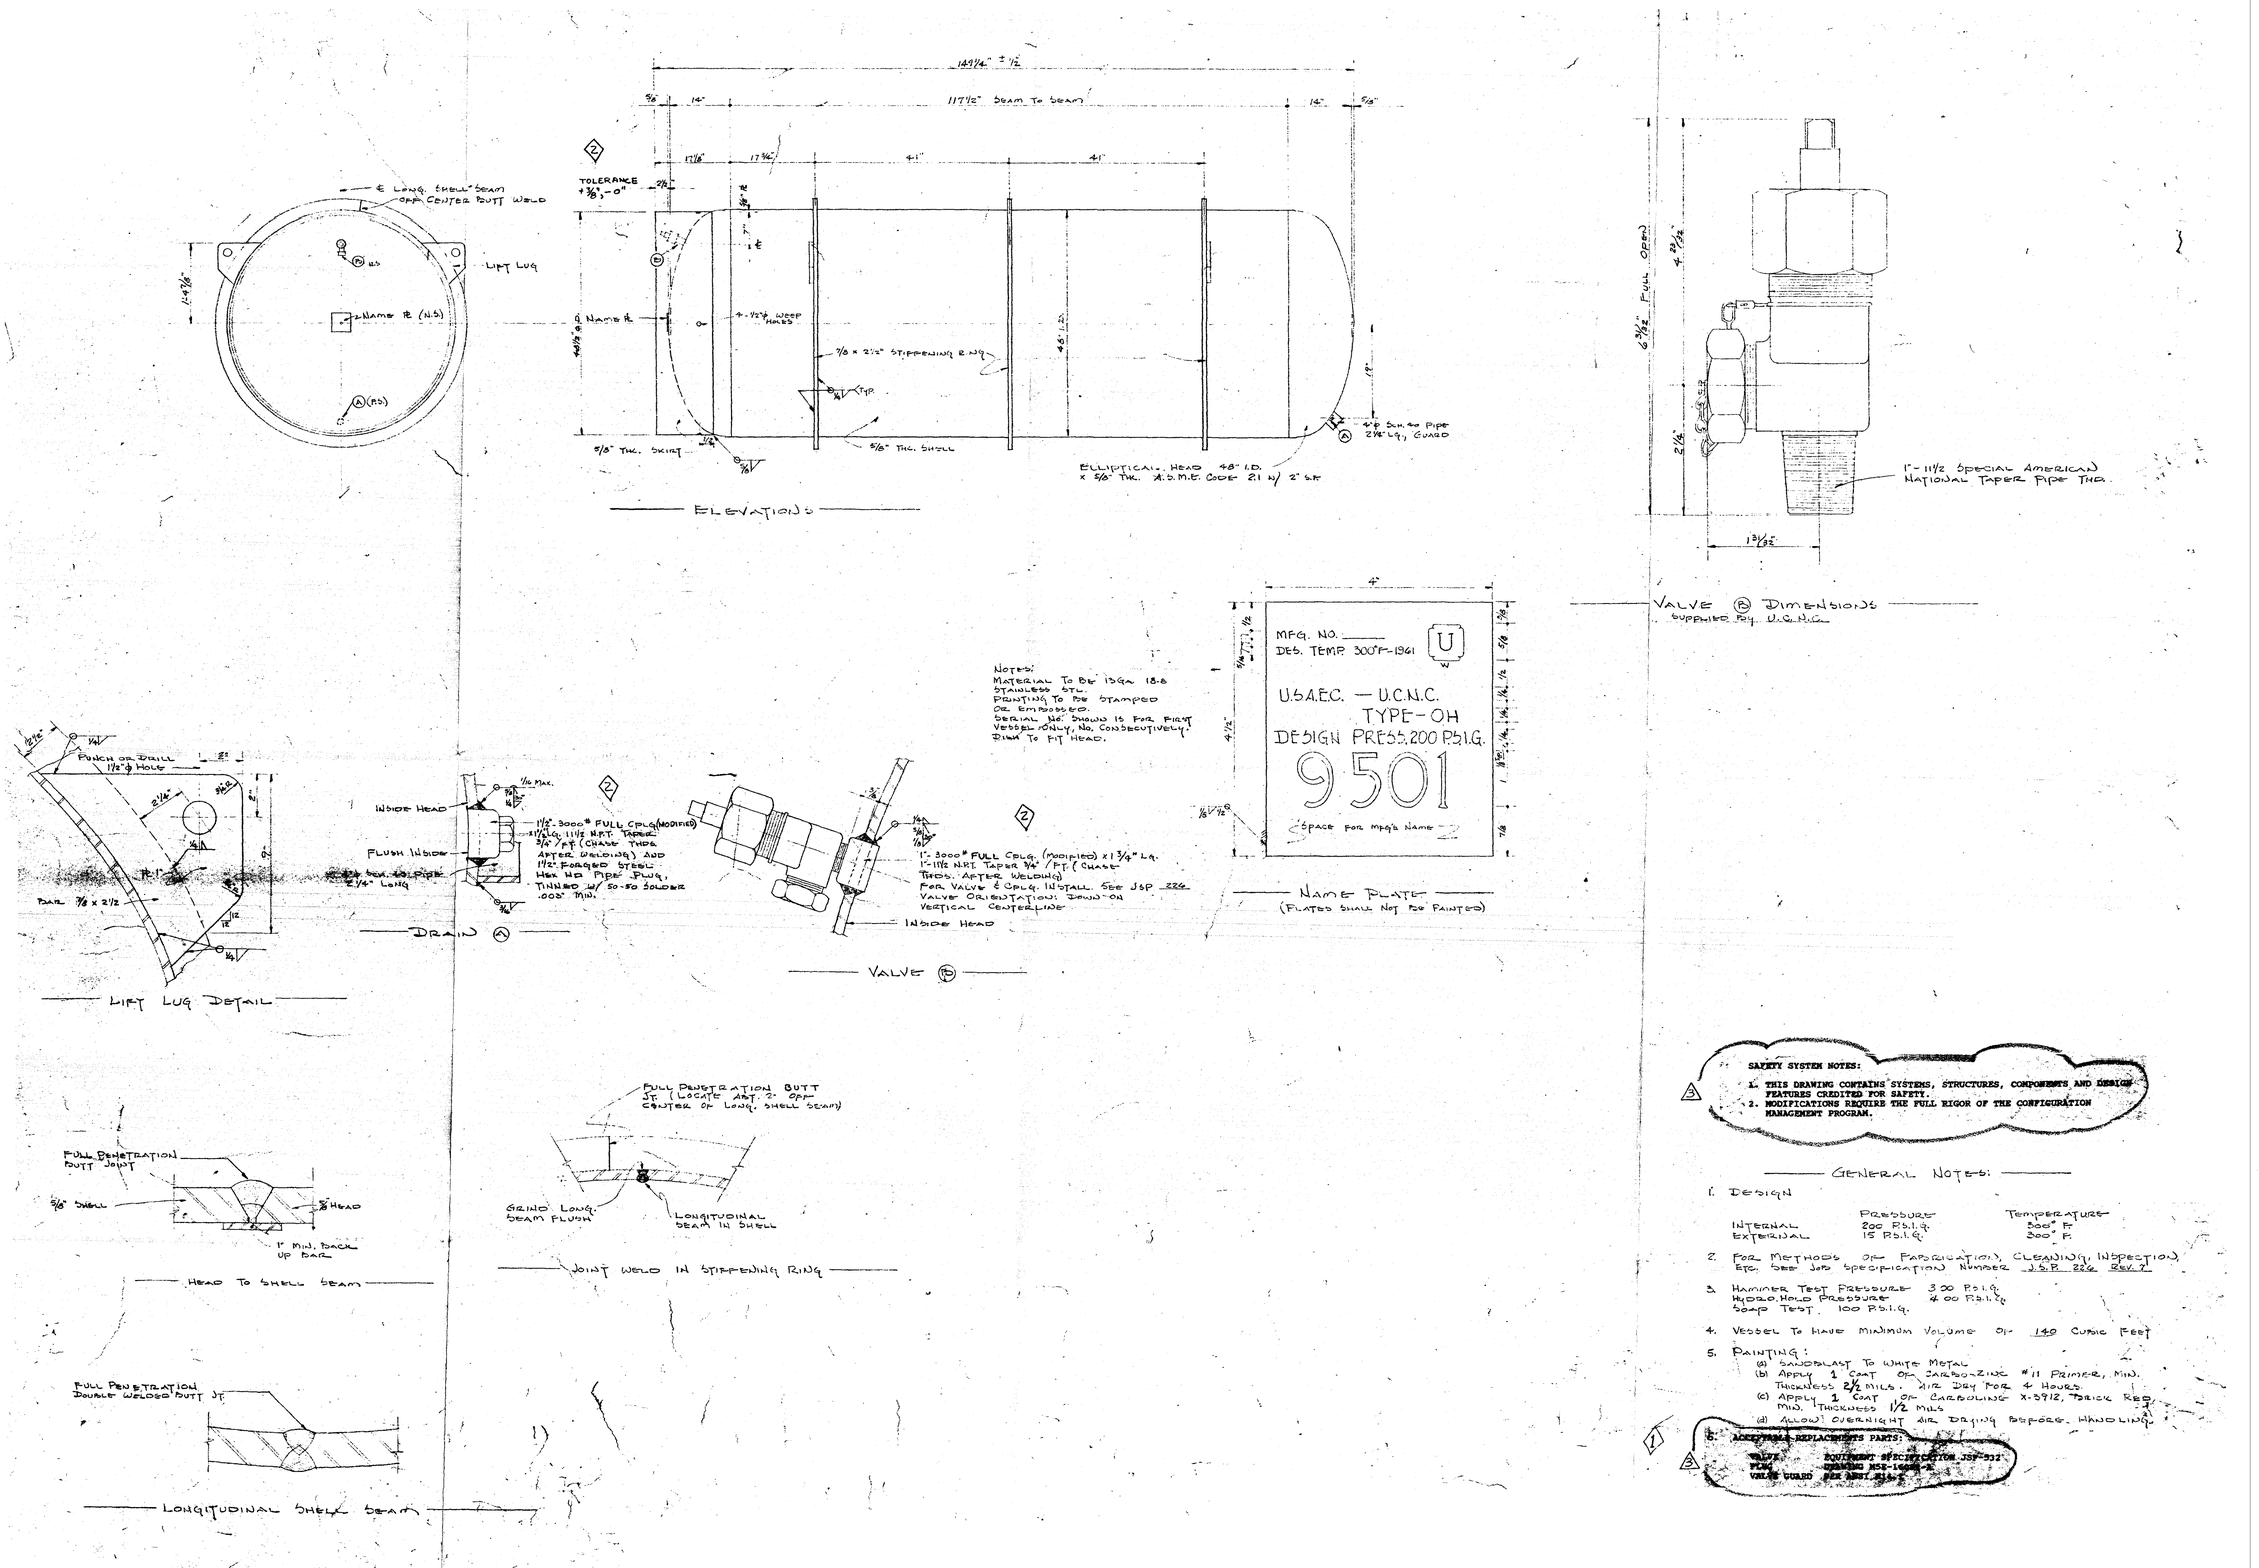

SAFETY SYSTEM NOTES:

1. THIS DRAWING CONTAINS SYSTEMS, STRUCTURES, COMPONENTS AND DESIGN FEATURES CREDITED FOR SAFETY.
2. MODIFICATIONS REQUIRE THE FULL RIGOR OF THE CONFIGURATION MANAGEMENT PROGRAM.

GENERAL NOTES:

1. DESIGN

	PRESSURE	TEMPERATURE
INTERNAL	200 P.S.I.G.	300° F.
EXTERNAL	15 P.S.I.G.	300° F.

2. FOR METHODS OF FABRICATION, CLEANING, INSPECTION, ETC. SEE JOB SPECIFICATION NUMBER J.S.P. 226 REV. 7
3. HAMMER TEST PRESSURE 300 P.S.I.G.
   HYDRO. HOLD PRESSURE 400 P.S.I.G.
   SOAP TEST 100 P.S.I.G.
4. VESSEL TO HAVE MINIMUM VOLUME OF 140 CUBIC FEET
5. PAINTING:
   (a) SANDBLAST TO WHITE METAL
   (b) APPLY 1 COAT OF CARBO-ZINC #11 PRIMER, MIN. THICKNESS 2 1/2 MILS. AIR DRY FOR 4 HOURS.
   (c) APPLY 1 COAT OF CARBOLINE X-3912, BRICK RED, MIN. THICKNESS 1 1/2 MILS
   (d) ALLOW OVERNIGHT AIR DRYING BEFORE HANDLING.
6. ACCEPTABLE REPLACEMENTS PARTS:
   VALVE EQUIPMENT SPECIFICATION JSP-532
   PLUG DRAWING MSE-16[illegible]
   VALVE GUARD SEE ANSI [illegible]

TYPE OH CYLINDER